


# Kabiny tunelowe


## Standard models

| Cab model   | Floor area dimension (mm) | Height int. (mm) | Dust Collector Power | External dust collector | Air flow | Filtration input air | Filtration output air | External Dust Collector | Sliding doors |
|-------------|---------------------------|------------------|----------------------|-------------------------|----------|----------------------|-----------------------|-------------------------|---------------|
| KPT-1520400 | 2000x4000                 | 2000mm           | >= 22kW              | ?                       | Vertical | ?                    | ?                     | ?                       | option        |
| KPT-2030600 | 2000x6000                 | 3000mm           | >= 22kW              | ?                       | Vertical | ?                    | ?                     | ?                       | option        |
| KPT-2030900 | 2000x9000                 | 3000mm           | >= 22kW              | ?                       | Vertical | ?                    | ?                     | ?                       | option        |
| KPT-3020400 | 3000x4000                 | 2000mm           | >= 22kW              | ?                       | Vertical | ?                    | ?                     | ?                       | option        |
| KPT-3030600 | 3000x6000                 | 3000mm           | >= 22kW              | ?                       | Vertical | ?                    | ?                     | ?                       | option        |
| KPT-3030900 | 3000x9000                 | 3000mm           | >= 22kW              | ?                       | Vertical | ?                    | ?                     | ?                       | option        |

**These are examples of standard cabins - other dimensions, configurations, available on individual request.**

## Photos

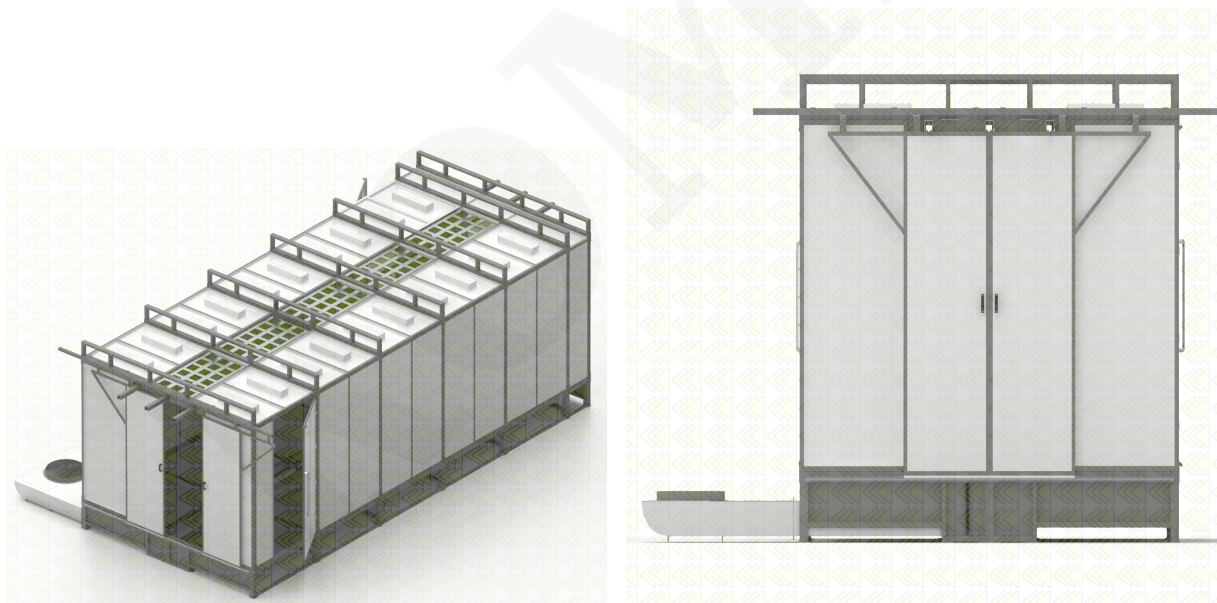

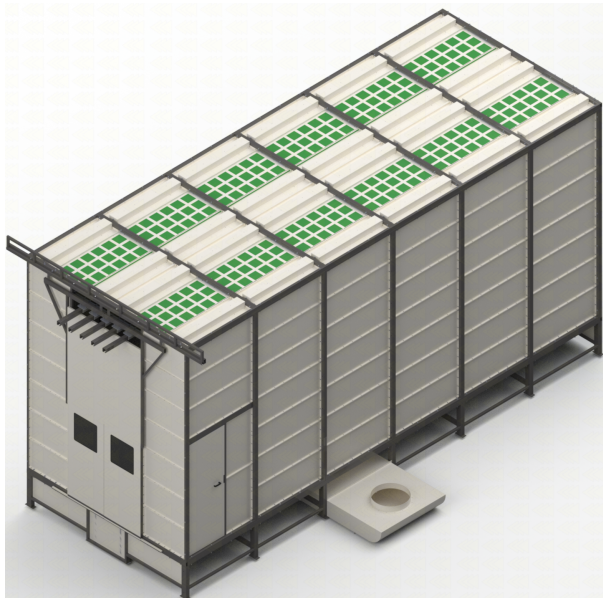


## Cleanliness

### Input air filter

We know that maintaining high air quality in production halls can be difficult, so this solution was created for this purpose.

KPT tunnel cabins are equipped with input filters mounted on the cabin ceiling, which are designed to pre-filter the air that enters the cabin.

This is to catch particles that, in the case of painting in open booths, would probably end up on the painted details.

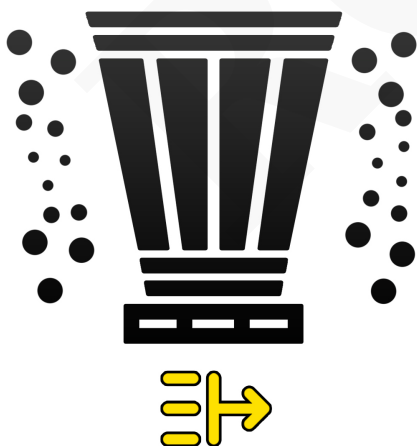

### Paint filtration and air purification

The type of filters used in tunnel cabin dust collectors is much more efficient than in the case of standard cabins, which means that the air sucked into the cabin returns back to the hall very well cleaned of solid particles.

## Lighting

The tunnel cabin has very good lighting, almost the entire ceiling is lined with LED lamps in accordance with EN 16985, ensuring work comfort and even better quality of painting.

## Comfort




### Adjustable thrust

Each of the dust collectors used in the tunnel cabins has a built-in inverter that can be controlled from the touch panel.

### Touch controls

ROMER cabins are equipped with 4" color touch screens. Cabin operation is intuitive, it has 3 modes: automatic (timed), automatic (based on a clogged filter sensor) or manual.

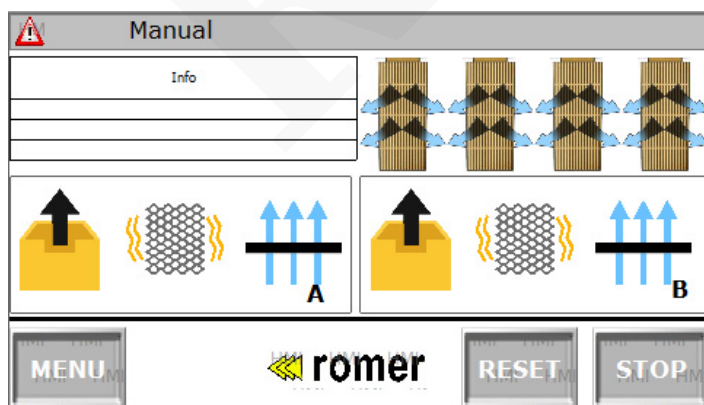

### Automatic filter cleaning

The electronic system of automatic filter cleaning has a range of adjustment of cleaning frequency and firing time. Each filter is cleaned separately, the filters can also be cleaned manually using the buttons. We know from experience that it is difficult for the operator to enforce filter cleaning. Thanks to this system, the operator will no longer have to think about it.

## Environmental cleanliness

When using standard booths, it is difficult to keep the spraying area clean.

It depends on many factors and the operator himself. In the case of using a tunnel cabin, keeping the hall clean is much easier, because the cabin is enclosed with walls and the spraying takes place inside.



## Cab Puller

The cabin, by dragging the sling beams within the cabin, improves work efficiency, thus relieving the painter, who no longer has to move them manually.

## Filter clogging sensor

A sensor is installed in the cabins that queues filters for cleaning when they become clogged. The system also informs you when the filters are exhausted

