


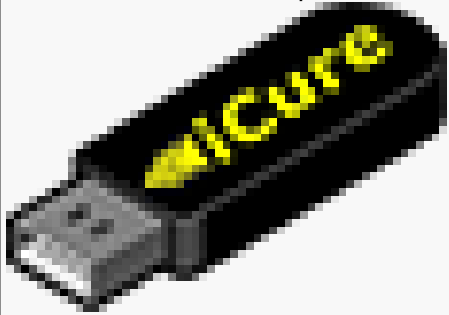

# SPARK oil/gas furnaces

Low price



Seria	SPARK	ROMER
Model	SW Series	SW Series
Power	Oil / NG / LPG	Oil / NG / LPG
Type of heat exchanger	Lateral	ROMER® R&D
Chimney heat loss * (nom. - difference)	10%	2%
Display diagonal	4"	7"
Klasa procesora	0.5us	0.05us
Multi Zone Heat System <b>Multi zone heat</b>	×	(Optional)
Forced venting of the chamber	×	(Optional)
Programmable chimney (electric)	×	✓

ROMER - Producent wysokiej jakości lakierni proszkowych

	✘	✓
Automatic burner reset	✘	✓
History of processes	✘	✓
Combustion chamber (steel)	Stainless	Stainless, Heat-resistant
Forced air circulation	✓	✓
Air circulation through walls	✘	✓
Air circulation near the floor	✓	✓
Two-channel USB temperature recorder 	✘	✓
 iCure™ software	✘	✓
Exhaust gas temperature sensor	✓	✓
Number of temperature sensors	2	3+
Wall thickness (mm)	160	240
Ceiling thickness (mm)	160	460
Number of programs	10	20
Max. number of steps in the program	1	10
Average heating time up to 180 ° C	25min	20min
Number of door leaves	2	2
Diagnostics / update via the Internet	✓	✓
Media consumption counter	✘	✓
Stainless steel ceiling elements	✘	✓
Automatic analysis of burner behavior	✘	✓
Automatic analysis of sensor behavior	✘	✓
Detection of "chimney back draft"	✘	✓
Cycle end time prediction	✘	✓
Additional sensor (overheating protection)	✘	✓
Explosion proof closures	✓	✓

Silicone door seal	✓	✓
--------------------	---	---

\* When heating the chamber to 180 ° C and set to standard heating parameters compatible with type of heat exchanger

ROMER